


EZCHANGE SALT FREE DESCALER

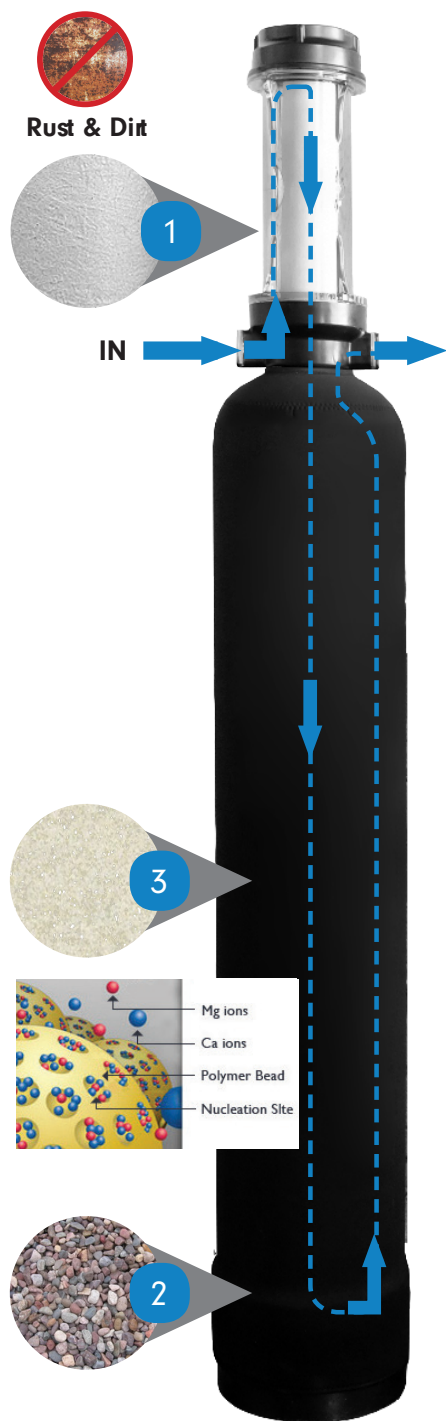

SUPERIOR PERFORMANCE

Proprietary formulation of red flint and Nucleation Assisted Crystallization (Nac) Technology

- Extend the life of your home appliances and plumbing
- No salt, electricity or drainage for wastewater required

3 STAGE FILTRATION

STAGE 1: 5 MICRON PRE-FILTER

Stops rust, dirt and particles

20% more filtration surface area with our exclusive 11 inch pre-filter

STAGE 2: TURBIDITY FILTER

Specialty red flint helps reduce turbidity

STAGE 3: NAC (NUCLEATION ASSISTED CRYSTALLIZATION)

Transforms dissolved hard minerals into harmless, inactive microscopic crystals, which harmlessly passed through your water and down the drain.

HIGH PERFORMANCE SCALE PREVENTION MEDIA

Features:

No regeneration, No salt, No backwash, No chlorine, No electricity is required. Long service life.

Appearance: White opaque granules

Bead Size: 0.55 - 0.75 mm

Mesh (US): 20x35

Bulk Density: 780 g/L

Instruction of use:

Rinse with water for 1-2 minutes after installation

Storage:

Store in a dry place. Keep away from sunlight.

Do not freeze or store below 0°C (32°F)

H-Phrase: none

P-Phrase: none

Manufacturer:

Watch Water GmbH
Fährackerstr. 14, D-68165, Mannheim, Germany

Batch No / Lot No:

Tested and Certified to NSF/ANSI 61 for materials safety only



Transport information:

ADR - IMDG - IATA/ICAO
Not regulated for transport

Net volume: 60 liters
Weight (approx): 47 kg

WQA Approved Label

EZCHANGE SALT FREE DESCALER



- **Effective scale reduction that is eco-friendly**
- **No salt, no electricity, no backwashing**
- **Extend the life of your home appliances and plumbing**
- **Easy, no mess pre-filter change**
- **3-Stage Filtration**

Descaler media certified under NSF/
ANSI 61 and NSF/ANSI 372 from WQA



Made in Canada
from imported components

Housing and fittings tested to NSF 42

SYSTEMS FEATURES

PATENTED TOP LOADING PREFILTER

- Clear plastic housing for visibility
- Wings inside the housing that guides and holds the prefilter in place
- No mess pressure release valve

INTEGRATED PRE-FILTER AND DISTRIBUTOR

- Significantly reduce leak points, extra pipe cutting, and joinery
- High Flow Distributor safeguard against sudden drop in water pressure

SCUBA SLEEVE

- Prevents condensation on the tank

USER FRIENDLY DESIGN

- No mess, easy filter change: the customer simply unscrews the top cap, pulls out the dirty pre-filter and drops in a new prefilter. *Traditionally the entire housing is removed with a key and often causing excess water to spill onto the floor*
- Modular housing and connectors making the system easily expandable and customizable
- 20% more efficient installation

SPECIFICATIONS

Model: FG-EZC-DS1000

Dimensions (L x W x H): 8"x8"x56"

Weight: 20 lbs.

Operating Pressure Range (PSI): 20-100

Operating Temperature (°F): 40-90

Flow Rate (GPM): 7 gals./min.

Flow Capacity (Gals.): 1,000,000

EZCHANGE SALT FREE DESCALER



Prevent Scale



Streak Free Dishware

- Effective scale reduction that is eco-friendly
- No salt, no electricity, no backwashing
- Extend the life of your home appliances and plumbing
- 3-Stage Filtration

Descaler media certified under NSF/ANSI 61 and NSF/ANSI 372 from WQA

Housing and fittings tested to NSF 42

NSF/ANSI 372



Made in Canada
from imported components



Hot Water Appliances Last Longer



Keep Shower Heads and Faucets Clean

SYSTEMS FEATURES

INTEGRATED PRE-FILTER AND DISTRIBUTOR

- Significantly reduce leak points, extra pipe cutting, and joinery
- High Flow Distributor safeguard against sudden drop in water pressure

SCUBA SLEEVE

- Prevents condensation on the tank

USER FRIENDLY DESIGN

- Modular housing and connectors making the system easily expandable and customizable
- 20% more efficient installation

SPECIFICATIONS

Model: FG-EZC-DS1000

Dimensions (L x W x H): 8"x8"x56"

Weight: 20 lbs.

Operating Pressure Range (PSI): 20-100

Operating Temperature (°F): 40-90

Flow Rate (GPM): 7 gals./min.

Flow Capacity (Gals.): 1,000,000



SUPERIOR PERFORMANCE

A: TURBIDITY FILTER

Specialty red flint helps reduce turbidity

B: NAC (NUCLEATION ASSISTED CRYSTALLIZATION)

Transforms dissolved hard minerals into harmless, inactive microscopic crystals, which harmlessly passed through your water and down the drain.

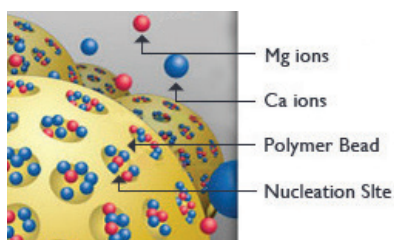

HIGH PERFORMANCE SCALE PREVENTION MEDIA

Features:

No regeneration, No salt, No backwash, No chlorine, No electricity is required. Long service life.

Appearance: White opaque granules

Bead Size: 0.55 - 0.75 mm

Mesh (US): 20x35

Bulk Density: 780 g/L

Instruction of use:

Rinse with water for 1-2 minutes after installation

Storage:

Store in a dry place. Keep away from sunlight

Do not freeze or store below 0°C (32°F)

H-Phrase: none

P-Phrase: none

Manufacturer:

Water Water GmbH
Friedrich 14 D-51615 Mannheim, Germany

Batch No / Lot No:



Tested and Certified to NSF/ANSI 61 for materials safety only

Transport information:

ADR - IMDG - IATA/ICAO
Not regulated for transport

Net volume: 60 liters

Weight (approx): 47 kg

WQA Approved Label